

ADDENDUM NO. 1**BID NO. 25-05a**

To all holders of the specifications, the following corrections are hereby made. All other items shall remain unchanged. This addendum shall become part of the Contract Documents for the above referenced project.

Acknowledgement of Addendum

Name: _____

Company: _____

Date: _____

Signature: _____

THE FOLLOWING TOPICS WERE DISCUSSED AT THE PROJECT PRE-BID MEETING HELD ON-SITE ON 3-28-25. SEE SIGN-IN SHEET ATTACHED HERE


- 1) **Electrical Requirements and Control Package:** There is no new control package included in this project. The manufacturer has specified that the new equipment will run off of the existing control and electrical supply. The selected contractor will be responsible for any electrical items that may need to be updated by the current electrical code. There are some items, like conduit, hangers, etc., associated with the removal of the existing bridge that will need to be replaced within this scope. Also, the existing light post will need to be preserved during demolition and reinstalled after the installation. This light post is simply anchored to the walkway grating.
- 2) **Staging and Lay-Down Area:** No staging area has been specified yet, but a space will be designated and reserved for the selected Contractor to temporarily store equipment and for vehicle parking before the project begins. The City will also specify an area for the Contractor to place materials during demolition and installation. These areas will be identified at the project pre-construction meeting after the project is awarded.
- 3) **Clarifier Surface Grouting:** No surface coating or grouting is included in the scope of this project. The manufacturer has stated that the existing surface is adequate and the surveyed elevations accurately reflect the grade at the bottom of the structure.
- 4) **Manufacturer Instructions:** The manufacturer installation instructions reference a "Master Erection Diagram" and other supplemental instructions for equipment start-up. The erection diagram is supplied with this addendum. Any other documentation required for installation and startup will be supplied by the manufacturer prior to installation.

03-28-25 PRE-BID MEETING SIGN IN SHEET

[illegible]

INFORMATION ONLY

REF	DESCRIPTION	QTY
10-1	BRIDGE	1
10-2	BRIDGE SLIDE PLATE	2
12-1	HANDRAIL	1
13-1	GRATING	1
15-1	DRIVE COVER	1
16-1	CENTER COLUMN	1
17-1	DRIVE CAGE	1
17-2	DRIVE CAGE HANGER	4
22-1	INFLUENT WELL – 4 SECTIONS	1
22-2	INFLUENT WELL SUPPORT CHANNEL	4
23-1	CLEVIS ROD	4
24-1	TRUSS ARM – 'A'	1
24-2	TRUSS ARM – 'B'	1
25-1	FLIGHT – INNER	2
25-2	FLIGHT	16
26-1	SQUEEGEE – INNER	2
26-2	SQUEEGEE	16
51-1	SCUM DEFLECTOR	1
52-1	SKIMMER SUPPORT	1
52-2	MOUNTING ANGLE	2
53-1	SCUM DEFLECTOR SUPPORT ANGLE	1
60-1	SCUM TROUGH	1
90-1	SKIMMER COUNTERWEIGHT	1

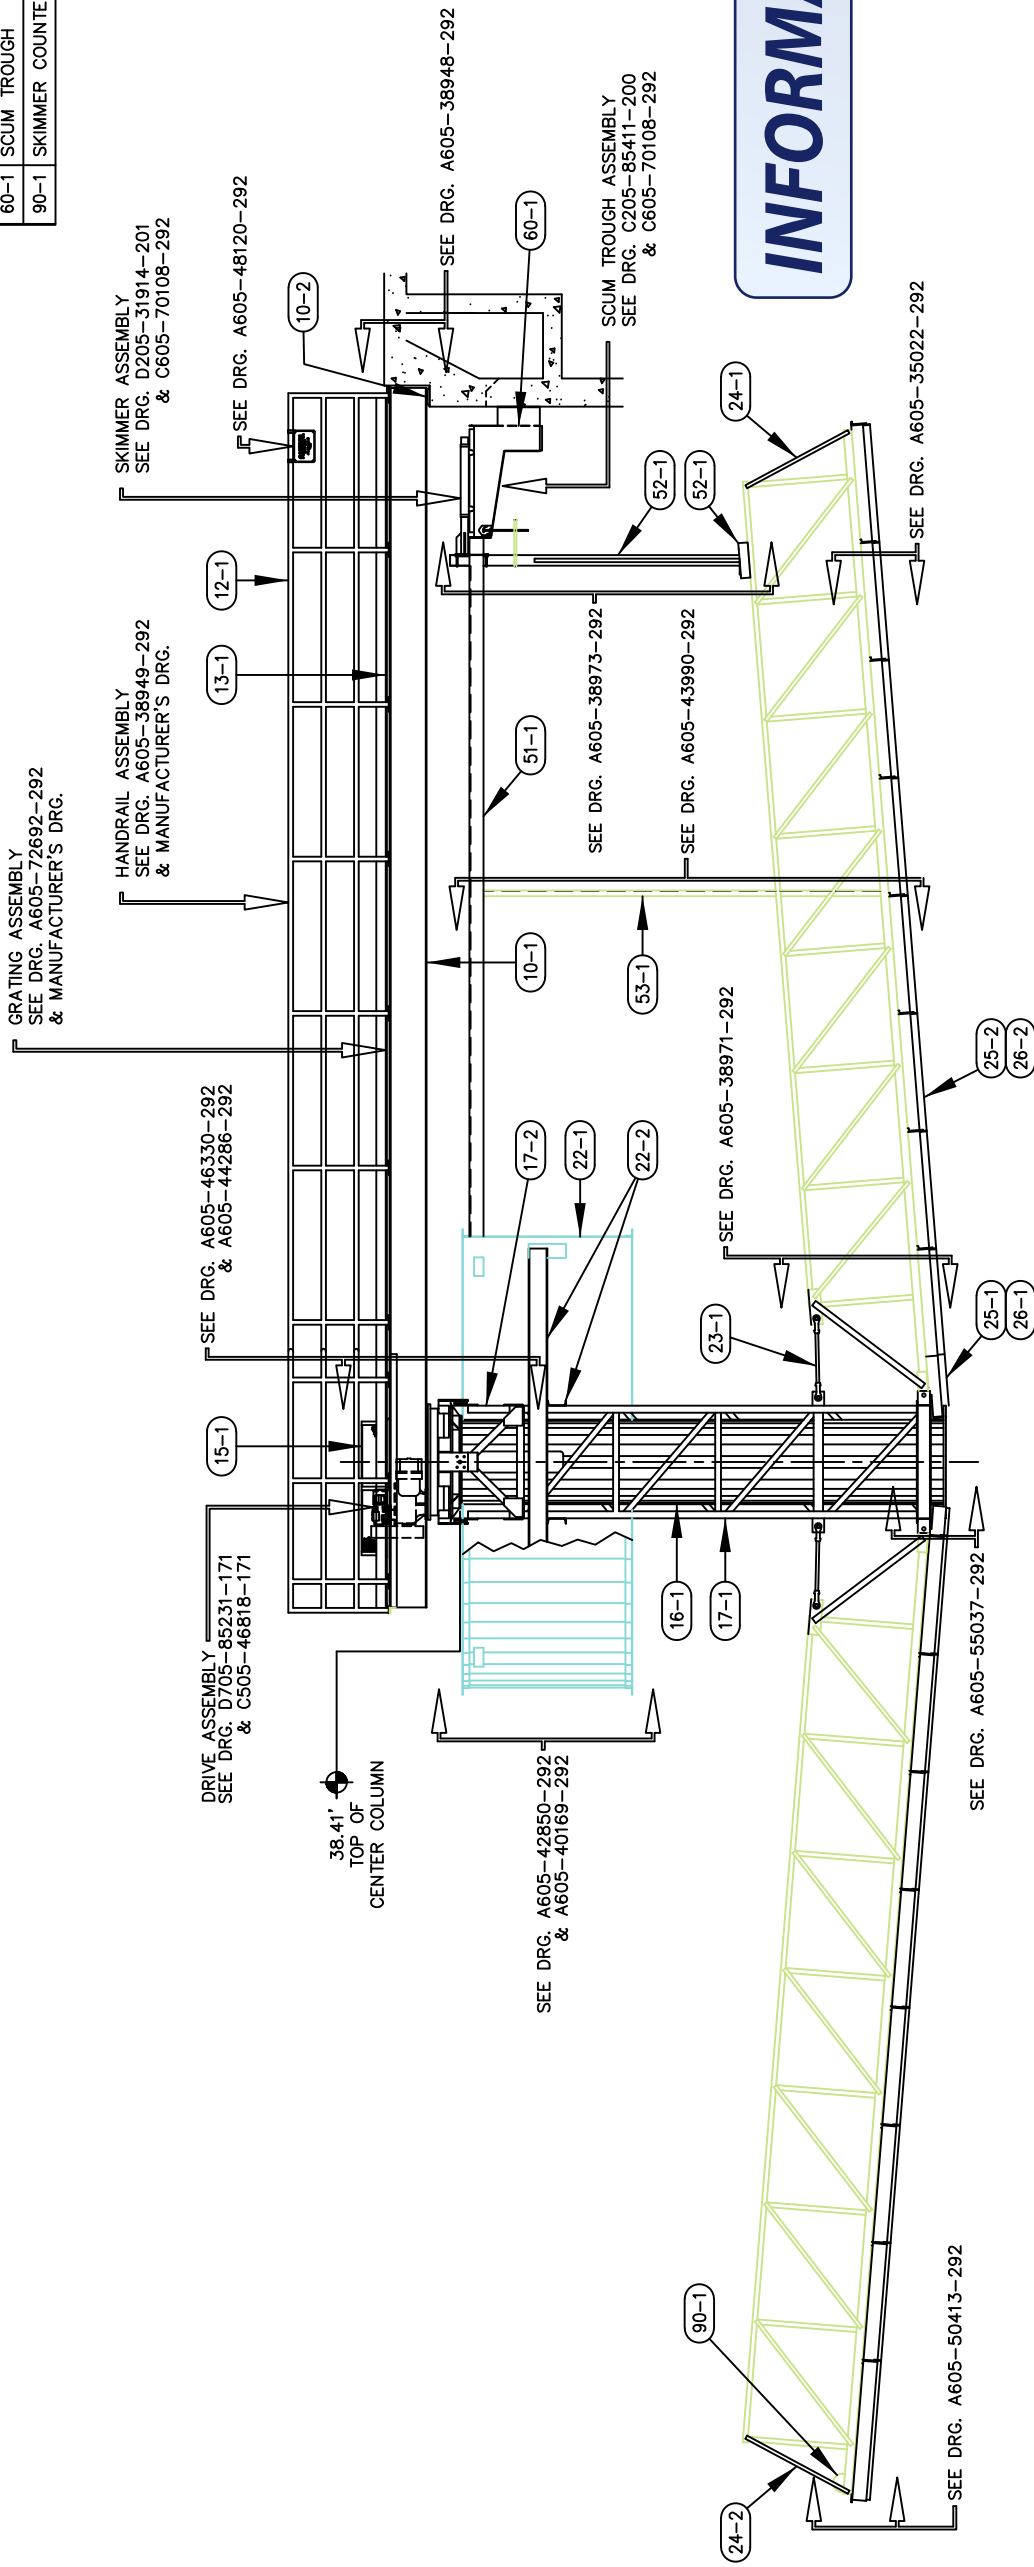

INFORMATION ONLY

[illegible]